

HygroMATIK® SPA

FlexLine

Steam generators



High flexibility in award-winning quality

- A series of units with a wide performance range for every area of application
- Individual configuration
- Easy operation
- Highest quality
- Environmentally friendly, incorporating reusable components



Steam generation
for spa and wellness applications

High flexibility in award-winning quality

The HygroMatik FlexLine as a modular system

Flexibility pays dividends

The HygroMatik FlexLine represents a modern generation of steam generators which consists of a basic model that can be expanded to create an individual solution suitable for all steam requirements.

Advantages:

- Ease of installation by means of individual pre-configuration ex factory
- Expansion options for retrofitting
- You only invest in the functions you really need

In order to make this flexibility available to you quickly, we have developed a modular system. This was awarded in three categories and FlexLine received the Plus X Award.

Custom-made for every area of application

The basic FlexLine model is the basis for all other configuration options. Thanks to individual extension capability the FlexLine can be adapted to the differing applications in the spa and wellness sector.



Spa resorts and wellness hotels

Fitness clubs and gyms

Cruise ships

Using the best method for optimum steam production

FlexLine is available as an electrode as well as a heater element steam generator – depending on your water quality and the required degree of control accuracy.



Replaceable stainless steel large area electrodes for different conductivities



Resistor type heater elements in highly corrosion-resistant alloy



Always the right performance for a rich steam picture

Equip HygroMatik FlexLine with the power you need for optimum steam output. Performance classes with steam output from 3 kg/h to 130 kg/h are selectable in 6 unit sizes. In addition, individual performance adjustments can be programmed both at the factory and on site.

Manifold options for a steam solution that fits perfectly

Every installation is different, and so every project places unique requirements on the steam solution. The FlexLine can be equipped with a wide range of options to optimally meet your project requirements. In addition, various protection and security functions can be installed and activated, e.g.

- HyFlush (cylinder flushing device)
- HyCool (integrated waste water cooling)
- Stub line flushing

This means that your system is optimally protected around the clock and you have less maintenance work. If needed, all options can be retrofitted. We are always pleased to provide advice.



Benefit from extensive functions


Powerful, smart and efficient

Excellent ease of operation

All HygroMatik FlexLine units are equipped with a capacitive 3.5" touch display. Operation and programming are selected via a flat and intuitive menu structure analogous to modern smartphone logic. In addition to this, subsequent software updates are quickly and easily possible via USB flash drive.



3.5" touch display

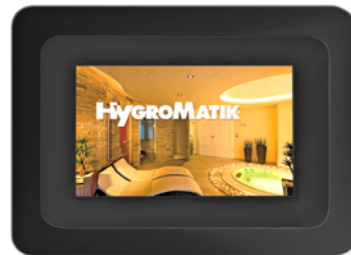

OPTIONAL: Spa Touch Control
5" touch display for external control

- At a glance comprehensible pictographs provide information on the operating condition
- Simple and fast navigation
- Information and system messages displayed as plain text
- Easy planning of operating periods by means of programmable timer functions
- Readout of service messages with date and time
- Integrated real-time clock



Smart control – powerful and quick response

The control and regulation technology of FlexLine units provides extensive possibilities that are simple and easy to operate.

- **Highest regulating accuracy and top protection** against excessive temperatures by means of second supply air and ventilation steam bath fan
- The option of up to **4 different lighting scenarios**
- Flexible switchover of up to **4 essences** without changing containers
- Freely programmable, overload-protected **digital input**
- **Integrated communication** protocol Modbus RTU or BACnet
- **Numerous control and reporting functions** can be assigned to up to 11 relays depending on the unit

Optimised unit performance for efficient utilisation

As with all our products, the HygroMatik FlexLine has been developed for an especially long life. The units feature technologies that not only reduce the amount of maintenance required, but also the wear of components. In addition, they are highly efficient with energy and resources.

- **Adjustable power limitation** from 25 - 100%
- **Adjustable load shedding** to temporarily adapt operation to the respective load conditions
- Active energy saving with the **ECO function** and flexible adjustment of the timer functions
- **Long-term continuous operation:** A robust base material provides our reusable cylinders with high temperature resistance and dimensional stability
- The **split cylinder** is easy to open and can be cleaned without using chemicals
- **Extremely durable:** All FlexLine cabinets are manufactured in corrosion-resistant stainless steel; the powder coating of the housing increases the lifespan and offers optimum work safety
- **Robust blowdown pump** for removing scale deposits to ensure long operating life cycles and minimal maintenance
- Highest safety standard for electrode steam humidifiers due to integrated **mechanical circuit breaker and mechanical safety temperature limiter** for heater type steam humidifiers
- Heater steam generators with **capacitive proportional water level sensor** without wearing parts



Comprehensive service functions



We have equipped the HygroMatik FlexLine with intelligent service functions for operational safety. These provide a high level of safety, reliability, control and comfort.

- **Reliable:** Preventive maintenance through permanent monitoring and intelligent evaluation of operating parameters can avoid unplanned downtimes
- **Convenient:** Detailed messages enable deviations to be identified and rectified more quickly
- **Simple:** The diagnostic mode can be started directly via the touch display without commissioning the unit completely
- **Flexible:** Service intervals can be calculated by the unit according to time as well as the amount of steam produced



For the sake of the environment

Active energy saving with the **ECO function**

Robust and durable cabinet

Reusable steam cylinders

Long and flexible service intervals

High resource efficiency



FlexLine electrodes technical data

A higher humidification performance is possible by connecting units together.

| Type | FLE05 | FLE10 | FLE15 | FLE20 | FLE25 | FLE30 | FLE40 | FLE50 | FLE65 | FLE80 | FLE100 | FLE130 |
|---|---|----------|-----------------|-----------|-----------|-----------------|---|-----------------|-----------------------|-------------------------|------------------|---------------|
| Steam output [kg/h] | 4.8-5.2 | 9.5-10.4 | 14.3-15.6 | 19.0-20.8 | 24.0-26.0 | 28.5-31.2 | 38.2-41.7 | 47.8-52.2 | 62.0-67.5 | 76.4-83.4 | 95.5-104.4 | 124.0-135.0 |
| Electrical connection ⁽¹⁾ | 380-415V / 3Ph / N / 50-60Hz | | | | | | 380-415V / 3Ph / N / 50-60Hz | | | | | |
| Rated power [kW] | 3.6-3.9 | 7.1-7.8 | 10.7-11.7 | 14.3-15.6 | 18.0-19.5 | 21.4-23.4 | 28.6-31.3 | 35.9-39.2 | 46.3-50.6 | 2 x 28.6-31.3 | 2 x 35.8-39.1 | 2 x 46.3-50.6 |
| Nominal current [A] | 5.4 | 10.8 | 16.2 | 21.7 | 27.1 | 32.5 | 43.3 | 54.1 | 70.4 | 2 x 43.3 | 2 x 54.1 | 2 x 70.4 |
| Fuse [A] ⁽²⁾ | 3 x 10 | 3 x 16 | 3 x 20 | 3 x 32 | | 3 x 40 | 3 x 50 | 3 x 63 | 3 x 80 | 2 x 3 x 50 | 2 x 3 x 63 | 2 x 3 x 80 |
| Number of steam cylinder | 1 | | | | | | 1 | | | 2 | | |
| Control | FlexLine mainboard with capacitive 3.5" touch colour display | | | | | | FlexLine mainboard with capacitive 3.5" touch colour display | | | | | |
| Internal control voltage ⁽³⁾ | 220-240V / N / 2.5A | | | | | | 220-240V / N / 2.5A | | | | | |
| Steam hose connection [mm] | 1 x 40 | | | | | | 2 x 40 ⁽⁴⁾ | 2 x 40 | 2 x 40 ⁽⁴⁾ | 4 x 40 | | |
| Max. filling capacity [l] | 5 | 13 | | | 21 | | 36 | 42 | 71 | | | |
| Empty weight [kg] | 16 | 22 | 23 | 26 | | 34 | 66 | 75 | | | | |
| Operating weight [kg] | 21 | 36 | 37 | 47 | | 70 | 108 | 147 | | | | |
| Dimensions WxHxD [mm] ⁽⁵⁾ | 460 x 535 x 320 | | 540 x 695 x 320 | | | 580 x 750 x 355 | | 640 x 785 x 420 | | 1130 x 750 x 420 | 1170 x 785 x 420 | |
| Water connection | Tap water of varying qualities, 1 to 10 bar, for 3/4" external thread | | | | | | Tap water of varying qualities, 1 to 10 bar, for 3/4" external thread | | | | | |
| Drain water connection | Connection Ø 1 1/4" | | | | | | Connection Ø 1 1/4" | | | 2 x Connection Ø 1 1/4" | | |

From our accessories range



Stainless steel nozzle with protective cover



Temperature sensor TF 105



FlexLine heaters technical data

A higher humidification performance is possible by connecting units together.

| Type | FLH03 | FLH06 | FLH09 | FLH15 | FLH25 | FLH30 | FLH40 | FLH50 | FLH80 | FLH100 | |
|---|---|-----------|-----------|------------------------------|-----------|-----------------------|-----------|------------------|-------------------------|---------------|---------------|
| Steam output [kg/h] | 2.7-3.3 | 5.5-6.5 | 8.2-9.8 | 13.7-16.4 | 22.7-27.1 | 27.4-32.7 | 36.5-43.5 | 45.5-54.3 | 73.0-87.0 | 91.0-108.6 | |
| Electrical connection ⁽¹⁾ | 220-240V / 1Ph / N / 50-60Hz | | | 380-415V / 3Ph / N / 50-60Hz | | | | | | | |
| Rated power [kW] | 2.1-2.4 | 4.1-4.9 | 6.2-7.3 | 10.3-12.3 | 17.1-20.3 | 20.6-24.5 | 27.3-32.6 | 34.1-40.7 | 2 x 27.3-32.6 | 2 x 34.1-40.7 | |
| Nominal current [A] | 9.4-10.2 | 18.7-20.4 | 10.7-11.7 | 16.0-17.5 | 15.6-17.1 | 25.9-28.3 | 31.3-34.1 | 41.5-45.4 | 51.8-56.6 | 2 x 41.5-45.4 | 2 x 51.8-56.6 |
| Fuse [A] | 1 x 16 | 1 x 25 | 3 x 16 | 3 x 20 | | 3 x 32 | 3 x 35 | 3 x 50 | 3 x 63 | 2 x 3 x 50 | 2 x 3 x 63 |
| Number of steam cylinder | 1 | | | | | | | | 2 | | |
| Control | FlexLine mainboard with capacitive 3.5" touch colour display | | | | | | | | | | |
| Internal control voltage ⁽³⁾ | 220-240V / N / 2.5A | | | | | | | | | | |
| Steam hose connection [mm] | 1 x 40 | | | | | 1 x 40 ⁽⁴⁾ | 2 x 40 | | 4 x 40 | | |
| Max. filling capacity [l] | 5 | | | 14 | | 36 | | 71 | | | |
| Empty weight [kg] | 18 | | | 25 | | 37 | | 80 | | | |
| Operating weight [kg] | 24 | | | 40 | | 74 | | 152 | | | |
| Dimensions WxHxD [mm] ⁽⁵⁾ | 460 x 535 x 320 | | | 540 x 695 x 320 | | 640 x 785 x 420 | | 1170 x 785 x 420 | | | |
| Water connection | Fully demineralised water / cleaned condensate / partially softened water / tap water of varying qualities, 1 to 10 bar, for 3/4" external thread | | | | | | | | | | |
| Drain water connection | Connection Ø 1 1/4" | | | | | | | | 2 x Connection Ø 1 1/4" | | |

We reserve the right to make technical changes.

- (1) Other voltages upon request.
 (2) 13/28% above nominal power consumption after full blowdown. Observe actuation characteristics of automatic circuit-breakers. If necessary, select the next highest circuit-breaker level.
 (3) Separate control voltage upon request.
 (4) Incl. Y-piece DN40.
 (5) Outer dimensions of width and depth. Height incl. drain connection.



Our service for 100% customer satisfaction

- Long availability of replacement parts
- Technical hotline +49 4193 895-293 or hotline@hygromatik.com
- HygroMatik distributes in more than 45 countries
- Operating manuals, planning data and information on workshop events available online at hygromatik.com
- Visit our digital spa showroom at spa-showroom.hygromatik.com

HYGROMATIK® SPA

HygroMatik GmbH
Lise-Meitner-Str. 3
24558 Henstedt-Ulzburg
Germany

T +49 4193 895-0
F +49 4193 895-33
hy@hygromatik.de
www.hygromatik.com

member of **CAREL group**

